

mini lime®

PART NO. VARIOUS

GB

DESCRIPTION

- Completely reversible
- Quick and easy to install

Completely unique, in both design and installation advantages. The pump is clipped directly onto the reservoir so there is minimal suction lift. By connecting the drain hose to the reservoir of the pump unit, condensate water can be pumped away to a suitable drain.

IN THE BOX


- 1 x Assembled Mini Lime® pump with 300mm lime discharge tube with connector
- 1 x Anti Siphoning Device
- 1 x 220mm Lime Inlet hose 14mm ID
- 1 x 150mm Vinyl breather tube 6mm ID
- 1 x Elbow front and back
- 1 x 800mm Conduit front and back
- 1 x Internal conduit sleeve (Slimline system only)
- 1 x Gasket (Slimline, BBJ and Inoac/Inaba systems only)
- 1 x Ceiling plate
- 2 x Cable ties 140 x 3.6mm
- 4 x Cable ties 300 x 3.6mm
- 6 x Rawl plugs and screws

SPECIFICATIONS

- Pump rating: 230V AC, 16W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Maximum water temperature: 40°C
- Continuously rated
- Class II appliance
- Fully potted
- Thermally protected
- 79mm (h) x 99mm (w) x 44mm (d)
- Weight: 0.31kg

PERFORMANCE

- Water flow rate: 12L/h at zero head
- Maximum recommended head: 10m
- 23dB(A) @ 1m

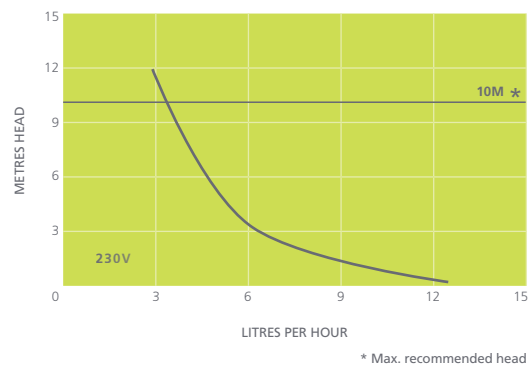

HORIZONTAL LOSSES

L/h	Horizontal (max 100)		
	30m	60m	90m
Vertical Head 3m	7.6	7.6	7.6
Vertical Head 2m	8.3	8.3	8.3

AVAILABLE SYSTEMS

Product Description	Part No.	
Slimline	Ivory	FP1500
	White	FP2857
BBJ	Ivory	FP2083
	White	FP2856
Inoac	Ivory	FP2100
	White	FP2855
Optimal	White	FP2291
Artiplastic	Ivory	FP2077
Replacement Pack	Standard	FP2124/3
	Extra	FP2124